


# AD1000

Plug-in module EV/VE/DD1000

The AD1000 IADS module is supported by the ATS1290N DGP, and designed to be installed directly on the terminal block of the following detectors: EV1000 series / VE1000 series / DD1000 series (standard as well as AM variants).

A 3 core connection only is required to the ATS1290N DGP / ATS Master panel.

As the AD1000 acts as I/O interfaces with one dual-zone input and two outputs, it is necessary to program anti-masking detectors to signal a technical fault or antimasking condition to the alarm output.

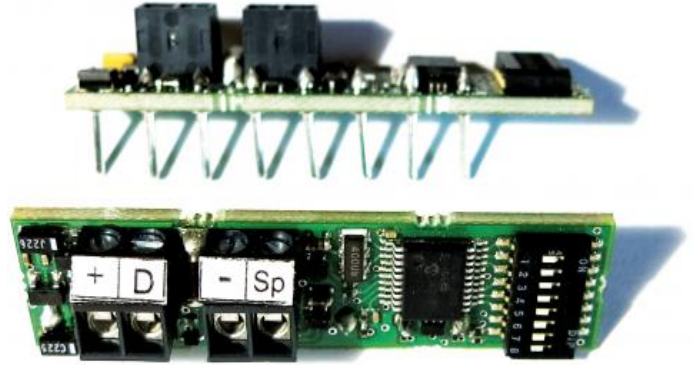

## Details

- Helps reduce installation time
- Up to 32 addresses can be set
- Fits into motion sensor connector block
- Supported by ATS1290N DGP

# AD1000

Plug-in module EV/VE/DD1000

## Technical Specifications

### General

Accessory group	Motion sensors
Type	Module

### Electrical

Operating voltage	9 to 24 VDC
Current consumption	max. 900 $\mu$ A

### Supply voltage

9 to 24 VDC (12 V nominal)

### IADS-bus voltage

12 or 24 VDC

### Min. current consumption at 13.4 VDC

400  $\mu$ A

### Max. current consumption at 13.4 VDC

900  $\mu$ A

### Bus current consumption out of bus

approx. 75  $\mu$ A

### Max. current capacity output day/night

200 mA

### Max. current capacity output walk test

200 mA

### Device type / Category

T3 / PIR

### Address range

0 to 31

