
CIUDECA THE ONLY OUTDOOR IN-WALL SOUNDER

1.

THE IN-WALL SOUNDER FULLY HIDE-AWAY.

>

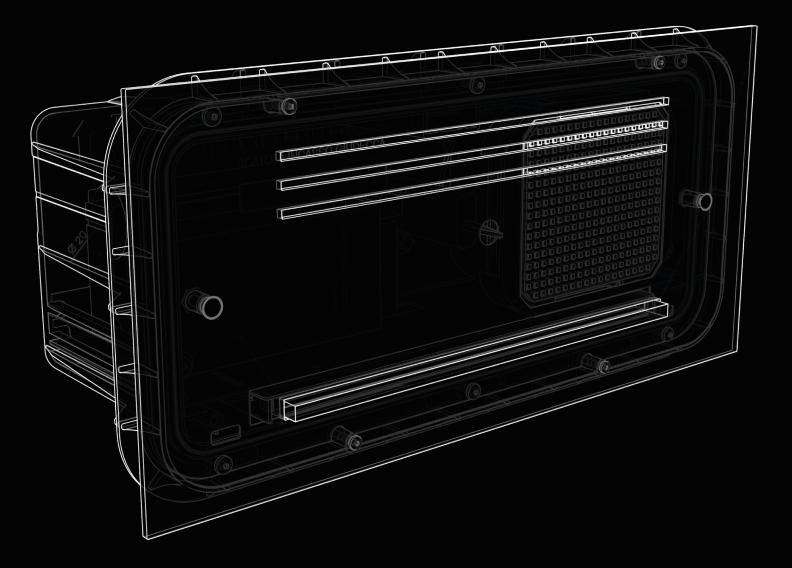

PLAN FLUSHING. CHOOSE COLOUR. INSTALL EASILY.



A PRODUCT FEATURING THE MAXIMUM SECURITY WITH MINIMAL AESTHETIC IMPACT

Giudecca is the first sounder completely wall built-in: the only visible component is its external cover, sturdy and yet slim, designed to look like a fan grill.

The sounder is equipped with an elegant light-guidance LED flashing unit, fully customisable and perfect to its deterrent power. The wide chromatic range allows Giudecca to satisfy the most diverse aesthetic needs.



BUILT-IN BOX

Unique and elegant, Giudecca is a product designed to make installation work easy.

The sounder features some useful technical tricks to ensure perfect performances and mounting.

- Built-in box provided in first-rate ABS with seal.
- Removable cover in galvanised metal, designed to avoid the contamination with construction material.
- Spirit level.

Σ

 \bigcirc

 \bigcirc

Σ


ш ⊢

Z

ш


>


Setup for cable passing.

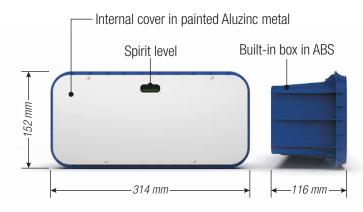

Drilling template to easily make the hole for Giudecca in-wall box in case of already existing walls.




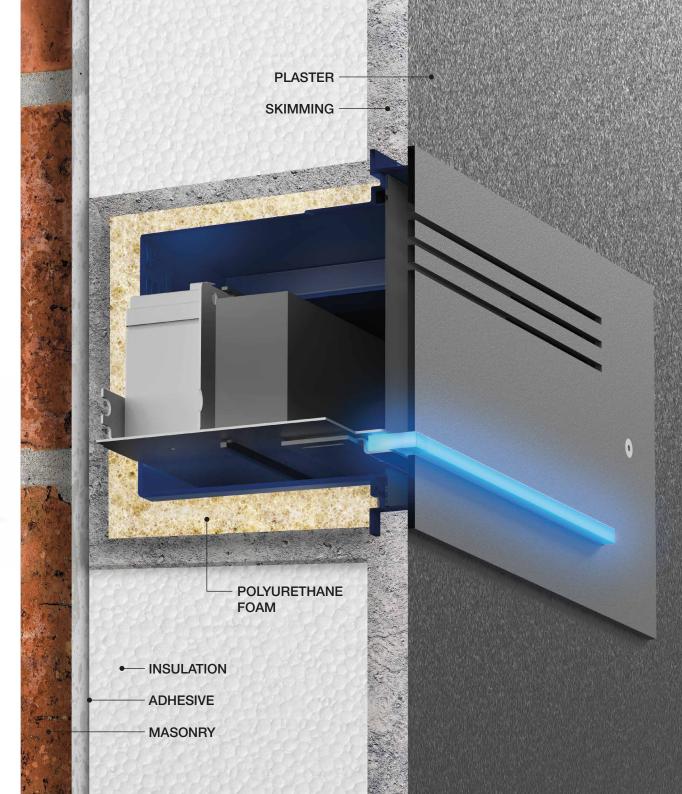

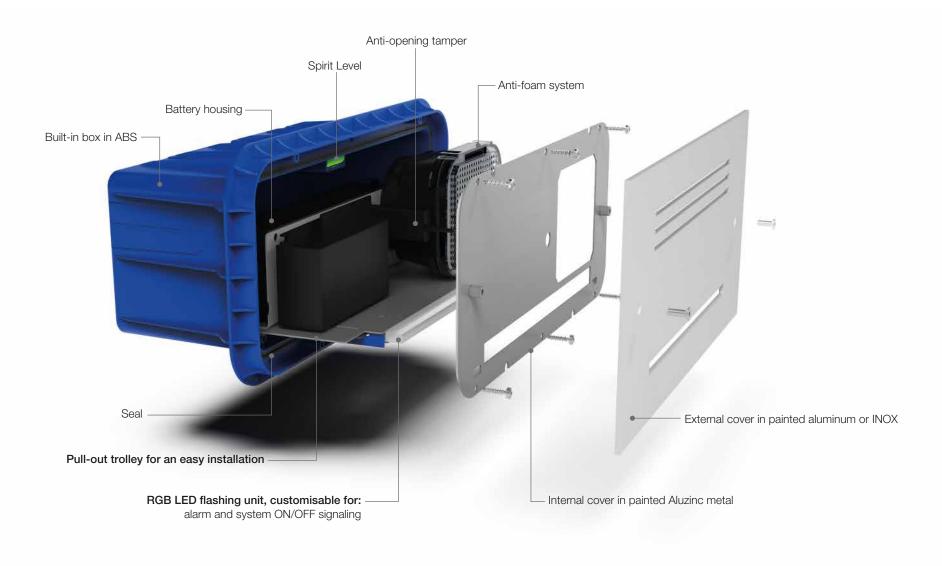

ADVANCED PERFORMANCES Care for details and top-level performances joined in one product, conceived to ensure total protection.

Thanks to its standard features, Giudecca proves to be user-friendly as well as a powerful deterrent.



Battery control according to EN 50131 standard

Customizable RGB LED optical ON/OFF signaling

1.2.3 Daily alarm counting

2 programmable sounds and 2 timings settable by dip switch



Block speaker

V E N I T E M . C O M



CUSTOMIZED SOLUTION

Giudecca is fully customisable, representing the ideal solution to satisfy the most diverse requests and aesthetic needs.

Its external cover can be easily painted over in any colour but also customised in size and shape to better fit any installation locations.

TECHNICAL DATA

Power supply:	13.8 Vdc
MAX consumption:	700 mA
Standby consumption:	15 mA
Battery consumption in alarm:	~ 1 A
LED consumption:	30 mA
Fundamental frequency:	2100 Hz
MAX level sound at 1 m:	105 dB
Control:	3 or 2 wires
Remote test of sounder and battery	
Anomaly output	
Anti-opening tamper	
Anti-foam device	
Block speaker	
Flash reset	
Daily alarm counting	
Customizable RGB LED	
Operating temperature:	−30°C ÷ +65°C
Battery:	12 V 2.1 Ah Pb
Standard:	EN 50131-4
Weight:	2500 gr.



Σ


0

 \mathbf{O}

ш -_ Ζ

ш

>



170 mm

335 mm



VENITEM.COM