

# VTH1560B/BW

IP Indoor Monitor



## Technical Specification

|       |             |
|-------|-------------|
| Model | VTH1560B/BW |
|-------|-------------|

### System

|                |                          |
|----------------|--------------------------|
| Main Processor | Embedded Micro Processor |
|----------------|--------------------------|

|                  |                   |
|------------------|-------------------|
| Operation System | Embedded LINUX OS |
|------------------|-------------------|

### Video

|                   |       |
|-------------------|-------|
| Video Compression | H.264 |
|-------------------|-------|

### Audio

|                   |       |
|-------------------|-------|
| Audio Compression | G.711 |
|-------------------|-------|

|             |                          |
|-------------|--------------------------|
| Audio Input | All-direction Microphone |
|-------------|--------------------------|

|              |                      |
|--------------|----------------------|
| Audio Output | Built-in Loudspeaker |
|--------------|----------------------|

|                    |                                     |
|--------------------|-------------------------------------|
| Bidirectional Talk | Support Dual-way Bidirectional talk |
|--------------------|-------------------------------------|

### Display

|            |                        |
|------------|------------------------|
| LCD Screen | 7" 800x480, Capacitive |
|------------|------------------------|

### Operation Mode

|       |               |
|-------|---------------|
| Input | Touch buttons |
|-------|---------------|

### Interface

|          |   |
|----------|---|
| Alarm In | 8 |
|----------|---|

|           |   |
|-----------|---|
| Alarm Out | - |
|-----------|---|

|       |   |
|-------|---|
| RS485 | - |
|-------|---|

### Network

|          |                           |
|----------|---------------------------|
| Ethernet | 10M/100Mbps Self-adaptive |
|----------|---------------------------|

|                  |        |
|------------------|--------|
| Network Protocol | TCP/IP |
|------------------|--------|

### General

|             |              |
|-------------|--------------|
| Memory Slot | Embedded 8GB |
|-------------|--------------|

## Features

- 7" TFT Capacitive touch screen
- IPC surveillance
- Alarm integration
- Embedded 8GB SD card
- Record & Snapshot



|              |       |
|--------------|-------|
| Installation | Flush |
|--------------|-------|

|       |                                      |
|-------|--------------------------------------|
| Power | DC 12V/ supply directly by VTNS1060A |
|-------|--------------------------------------|

|                   |                         |
|-------------------|-------------------------|
| Power Consumption | Standby ≤1.5W, Work ≤7W |
|-------------------|-------------------------|

|                     |             |
|---------------------|-------------|
| Working Temperature | -10°C~+55°C |
|---------------------|-------------|


|                   |           |
|-------------------|-----------|
| Relative Humidity | 10%~90%RH |
|-------------------|-----------|

|            |                        |
|------------|------------------------|
| Dimensions | 221.2mm×154.3mm×24.2mm |
|------------|------------------------|


|        |       |
|--------|-------|
| Weight | 0.8Kg |
|--------|-------|

# VTH1560B/BW

## Dimensions

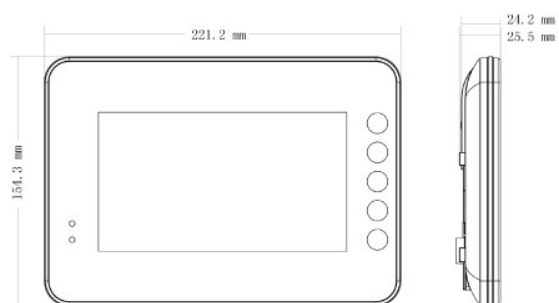

## View Area

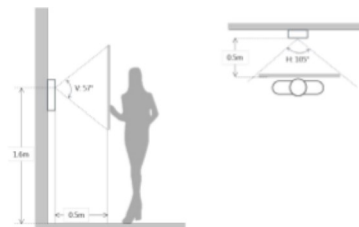

## Application

