


IP BULLET CAMERA , 2 MP, MOTORIZED ZOOM AND POSITIONER

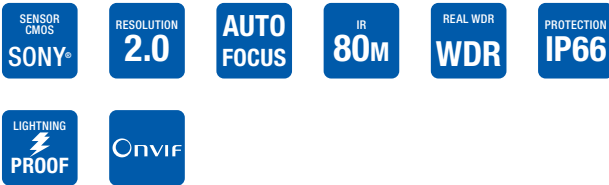

FEATURES


- 1080P HD resolution with Sony® CMOS sensor
- IR illumination up to 80 meters
- 2,8 ~ 12 mm autofocus varifocal lens
- BLC, real WDR, ROI
- Positioner: 0°~250° (H), -10°~55° (V)
- Speed: 0,5°~15°/sec. (H), 0,5°~10°/sec. (V)
- 255 presets, 8 rounds, 4 patterns
- OSD menu
- IP66
- Protection against voltage surges
- PoE supported

ACCESSORIES



HYU-170
IP68 PoE injector

DIMENSIONS

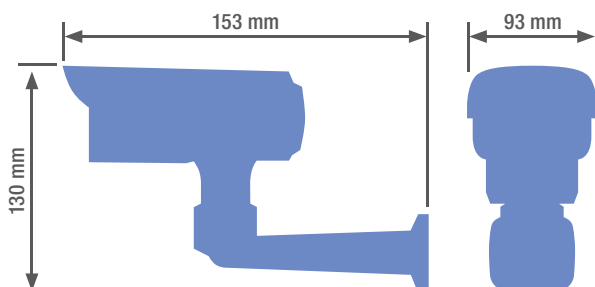

CAMERA

Image sensor	1/2,8 Sony® CMOS 2 MP
Effective pixels	1920(H) x 1080(V)
Frames per second	PAL/NTSC: 25/30 fps @1080P
IR illumination	4 led array: 80 meters
Minimum illumination	0 lux IR ON

LENS

Lens	2,8 ~ 12 mm
Focus mode	Auto

FUNCTIONS

Day/night	Auto (ICR dual)
OSD menu	Supported
Backlight compensation	BLC, real WDR
Digital zoom	16X
ROI	Supported
Defog	Supported

POSITIONER & TELEMETRY

Horizontal range	0° ~ 250°
Vertical range	-10° ~ +55°
Manual speed	0,5° ~ 15°/sec. horizontal / 0,5° ~ 10°/sec. vertical
Presets	255 presets (8 rounds, 4 patterns)

ELECTRICAL & ENVIRONMENTAL

Power supply	12V DC
PoE	HYU-170 required
Protection	IP66

PHYSICAL FEATURES

Case	Metal
Dimensions	153 x 93 x 130 mm