


IP BULLET CAMERA, 4MP WITH POE

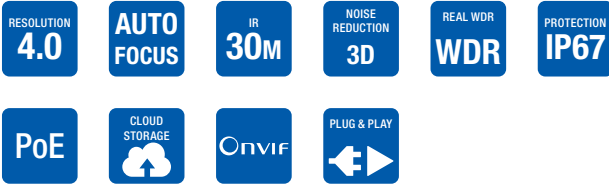

FEATURES

- 4 MP resolution with CMOS sensor
- H.264, H.264+ and MJPEG
- Double stream, IR illumination up to 30 meters
- 2,8 ~ 12 mm autofocus varifocal lens
- BLC, real WDR, 3D-DNR
- Privacy mask, ROI
- Tripwire and intrusion detection
- IP67
- PoE supported
- Plug&Play connection with NEXTGEN NVR
- Compatible with DDNS DEMES

SOFTWARE AND APPS


- HYUVMS and HYUCONNECT for Android and iOS
- HYU VMS client software
- Cloud P2P service: hyucloud.hyundai-security.es



ACCESSORIES



DIMENSIONS

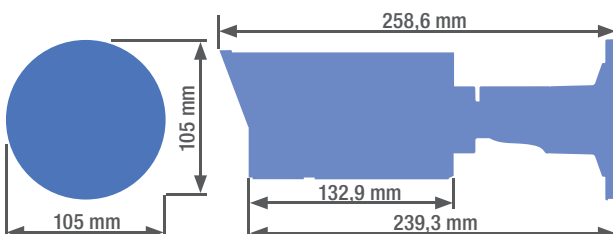

CAMERA

Image sensor	1/3 CMOS, 4 MP	
Effective pixels	2688(H) x 1520(V)	
Resolution	Stream 1	4MP (20 fps), 1080P, 720P (25/30 fps)
	Stream 2	640x360, (25/30 fps), 352x288 (25 fps), 352x240 (30 fps)
Electronic shutter	1/3s ~ 1/10.000s	
IR illumination	20 ~ 30 meters	
Minimum illumination	0,01 lux F1.2 (AGC On) / 0,014 lux F1.4 (AGC On) / 0 lux IR ON	

LENS

Lens	2,8 ~ 12 mm
Viewing angle	112° ~ 33,8°
Focus mode	Auto

FUNCTIONS

Day/night	Auto (ICR), Color, B/W
OSD menu	Supported
Backlight compensation	BLC, real WDR 120 dB
Noise reduction	3D-DNR
ROI	Supported
Privacy mask	Supported

INTELLIGENT ANALYSIS

Intelligent detection	Tripwire detection, intrusion detection, motion detection, dynamic analysis
-----------------------	---

AUXILIARY INTERFACE

Memory card slot	MicroSD/SDHC/SDXC card slot (up to 128 GB)
------------------	--

ELECTRICAL & ENVIRONMENTAL

Power supply	12V DC (±25%)
Consumption	5,5W (Max. 7,5W with ICR ON)
PoE	Supported
Working temperature	-30°C ~ +60°C
RH	≤95% (without condensation)
Protection	IP67

PHYSICAL FEATURES

Case	PVC & metal
Dimensions	95 x 105 x 258,6 mm
Weight	1200 g