

AS280G3

Indoor siren, metal housing, NFA2P Grade 3


Product overview

With an elegant design, this siren can be installed in a wide variety of environment up to light industrial situations.

Designed to comply against EN Grade 3 certification, the siren includes an enhanced protection against sabotage. The battery and power supply are fully supervised.

As soon as an intrusion is detected, the indoor siren triggers a powerful 105 dB sound signal.

Its sound and duration can be programmed and its battery has up to 60 hours autonomy.

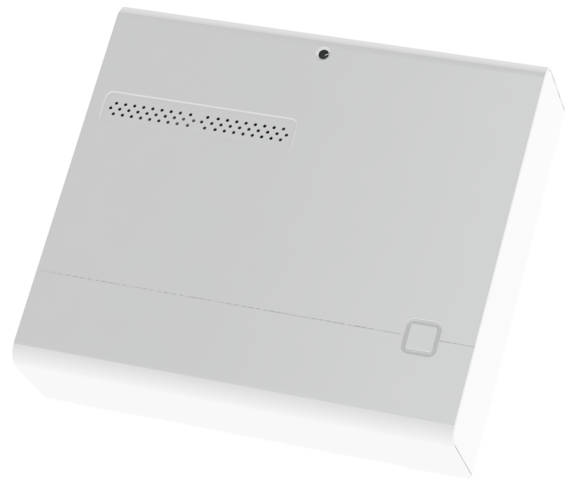

Einzelheiten

- Battery circuit protection with resettable fuse
- Enhanced tamper protection
- Aritech elegant design
- Self test every 24 hours to check the integrity of the battery and its charging circuit
- Engineer mode (for commissioning and to inhibit sounder operation)

AS280G3

Indoor siren, metal housing, NFA2P Grade 3

Technische Spezifikationen

Allgemein

Zubehörgruppe	Sirene
Typ	Innensirene
Schallgeberausgang (dB @ Abstand)	105 dB at 1 m (typical)

Flash-Spezifikationen

Aktueller Verbrauch	10 mA @ 13.8 V (quiescent)
---------------------	----------------------------

Elektrische Angaben

Netzteil	9 VAC
Betriebsspannung	9 to 15 V
Aktueller Verbrauch	100 mA at 9 to 15 VDC (typical)

Physikalisch

Abmessungen	187 x 167 x 47 mm
Nettogewicht	1340 g
Farbe	Weiß
Material	Stahl (lackiert)

Umweltbedingungen

Vandalismussicher	Ja
Betriebstemperatur	-10 to 55°C
Lagertemperatur	-10 to 55°C
Relative Luftfeuchtigkeit	<95% noncondensing
Umgebung	EN50130-5 ; Klasse II - Indoor (allgemein)
IP Klassifizierung	IP30

Regulativ

Kompatibilität	CE
Zertifizierung	EN50131 Grad 3
Standards	NFA2P Grade 3

Kompatible Produkte

Kategorie	Referenz	Beschreibung
Batterien	BS122N	Akku, 12 V, 2.2 Ah, VdS-Nr. G 101078