

DH-PFB211WA

Anti-corrosion Wall Mount Bracket



- Aluminium alloy, neat & Integrated design
- Concealed cable layout
- Strong load-bearing capacity: Supports a maximum weight of 3 kg (6.61 lb).
- Anti-corrosion: NEMA 4X (200 hours) rated.



Series Overview

Raising the bar on modern brackets, the anti-corrosion wall mount bracket blends reliability and sophistication into one design. Built to be sturdy with its aluminum alloy die-casting structure, it is both strong and hassle-free to install. The surface is spray-coated with one of the most effective anti-corrosion agents available today, meeting the criteria of NEMA 4X (200 hours). With its integrated design, this bracket outperforms most basic brackets, meeting the needs of locations such as coastal areas, chemical plants and businesses in the energy industry that require anti-corrosion products.

Technical Specification

Model

Model	DH-PFB211WA
-------	-------------

Environment

Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Operating Humidity	< 90% (RH)
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Storage Humidity	< 90% (RH)
Protection	Basic waterproof; Corrosion-proof, meets the criteria of NEMA 4X

Structure


Material	Aluminium alloy
Installation	Wall Mount
Color	Dahua white
Load bearing	3 kg(6.61 lb)
Dimensions	235.4 mm × 180.3 mm × 84.2 mm(9.27" × 7.10" × 3.31") (L × W × H)
Net Weight	0.98 kg(2.16 lb)
Product Dimensions	328.0 mm × 235.0 mm × 110.0 mm(12.91" × 9.25" × 4.33") (L × W × H)

Gross Weight	1.25 kg(2.76 lb)
Applicable Camera	Suitable for dome camera, please see "Accessory Selection"

Ordering Information

Type	Model	Description
Camera Mount	DH-PFB211WA	Wall Mount Bracket

Installation

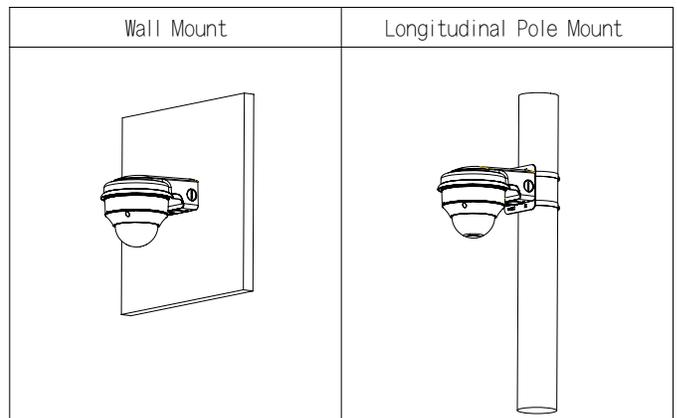

Dimensions (mm[inch])

