

# DH-PFA2600X

## Universal Joint



### Series Overview

The Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

### Scene

Ideal for mounting cameras, and works in temperatures ranging from –40 °C to +60 °C (–40 °F to +140 °F) and in environments with a relative humidity of less than 90%.

### Technical Specification

#### Structure

|                              |                                                                 |
|------------------------------|-----------------------------------------------------------------|
| Casing Material              | SPCC                                                            |
| Product Dimensions           | 80.0 mm × 60.0 mm × 79.0 mm (3.15" × 2.36" × 3.11") (L × W × H) |
| Appearance Color             | White                                                           |
| Net Weight                   | 0.24 kg (0.53 lb)                                               |
| Gross Weight                 | 0.27 kg (0.60 lb)                                               |
| Load Bearing                 | 2.0 kg (4.41 lb)                                                |
| Installation                 | Plane mount                                                     |
| Adjustable Inclination Angle | –60° to +60°                                                    |
| Applicable Model             | Please see "Camera Accessories Selection"                       |

- Built of SPCC material.
- Suitable for a variety of cameras and is elegant.
- Supports being adjusted to multiple angles to suit the needs of various installation locations.




|                       |                                                                                                                                                              |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Packaging Dimensions  | 89 mm × 69 mm × 90 mm (3.50" × 2.72" × 3.54") (L × M × H)                                                                                                    |
| Environment           |                                                                                                                                                              |
| Operating Temperature | –40 °C to +60 °C (–40 °F to +140 °F)                                                                                                                         |
| Operating Humidity    | < 90% (RH)                                                                                                                                                   |
| Storage Temperature   | –40 °C to +60 °C (–40 °F to +140 °F)                                                                                                                         |
| Storage Humidity      | 10%–90% (RH)                                                                                                                                                 |
| Anti-corrosion Level  | Basic Protection<br>*The products are designed for general use and are applicable even in areas with no specific requirements for anti-corrosion protection. |

### Ordering Information

| Type         | Model       | Description     |
|--------------|-------------|-----------------|
| Camera Mount | DH-PFA2600X | Universal Joint |

### Installation

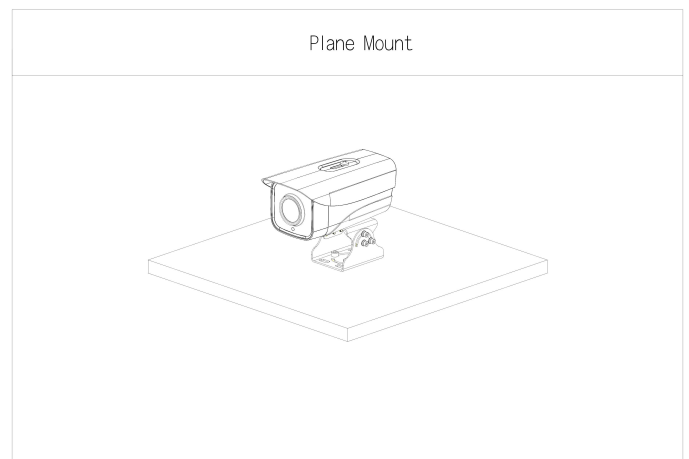



- Rev 002.000